

**TERRAZZO WHEELCHAIR
SHOWER RECEPTOR - WTR SERIES**

- One piece product made of black and white marble chips cast in white Portland cement
- Compressive strength of not less than 3,000 p.s.i. seven days after casting
- The surface is ground and polished with all air holes and/or pits grouted and the excess removed
- Integral stainless steel entry cap
- Available in custom sizes

Instructions:

- For wheelchair accessibility, receptor threshold entry height shall be 1/2" (13mm) complying with the barrier free requirements of ANSI Standard A-117.1-2000 and ADAAG
- Tiling flange cast integral shall be galvanized-bonderized steel and shall extend not less than 1" (25mm) above shoulder
- Shoulder shall not be less than 4" (102mm) high inside, 6" (152mm) high outside and not less than 3" (76mm) wide
- Drain body shall be stainless steel cast integral, and shall provide for a caulked lead connection not less than 1" (25mm) deep to a 2" (51mm) pipe, or a quick drain connection using a QDC-4 connector and shall include a removable stainless steel or brass strainer plate
- It is recommended that a floor drain at or near the entrance to the shower also be included
- Establish 1/4" (6mm) clearance between shower floor and building wall
- It is required that the entire area between the receptor and the building floor has a 1/2" (13mm) layer of mortar in order that the shower floor be level



SEE REVERSE FOR ROUGHING-IN DIMENSIONS


NOTES:

Establish 1/4" clearance between shower floor and wall. It is required that the entire area between the receptor and the building floor have a 1/2" layer of mortar in order that shower floors be level.


It is recommended that a floor drain be installed at or near the entrance of the shower.

Some models comply with Americans With Disabilities Act and A117.1 handicapped standards. Please refer to the table on page 2 of this spec sheet.


IMPORTANT: Rough-in dimensions may vary 1/2" and are subject to change or cancellation without prior notice.

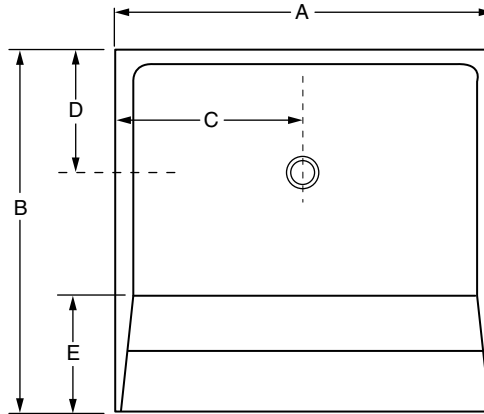

FRONT OF SHOWER

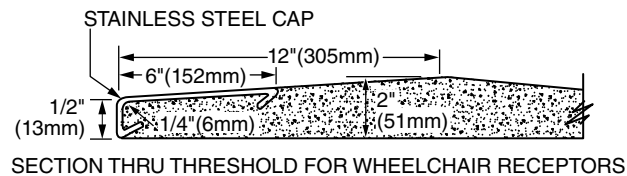

SECTION THRU THRESHOLD FOR WHEELCHAIR RECEPTORS

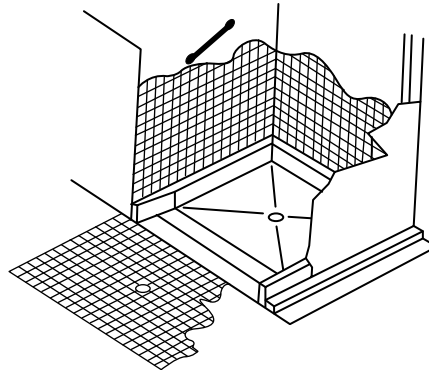

WITH STAINLESS STEEL THRESHOLD ONLY

MODEL	SIZE	APPROX. SHIP WT.	A	B	C	D	E	ADA COMPLIANCE
WTR-4990	36"x 36"	350 lbs / 159 kg	36"(914mm)	36"(914mm)	18"(457mm)	12"(305mm)	12"(305mm)	
WTR-4995	39"x 39"	365 lbs / 166 kg	39"(991mm)	39"(991mm)	19.5"(495mm)	12"(305mm)	12"(305mm)	YES
WTR-5000	48"x 48"	603 lbs / 274 kg	48"(1219mm)	48"(1219mm)	24"(610mm)	18"(457mm)	12"(305mm)	
WTR-5001	60"x 48"	623 lbs / 283 kg	60"(1524mm)	48"(1219mm)	30"(762mm)	18"(457mm)	12"(305mm)	
WTR-5002	60"x 60"	855 lbs / 388 kg	60"(1524mm)	60"(1524mm)	30"(762mm)	24"(610mm)	12"(305mm)	
WTR-5003	42"x 70"	800 lbs / 363 kg	42"(1067mm)	70"(1778mm)	21"(533mm)	9"(229mm)	12"(305mm)	YES
WTR-5004	48"x 70"	880 lbs / 399 kg	48"(1219mm)	70"(1778mm)	24"(610mm)	9"(229mm)	12"(305mm)	YES
WTR-5005	60"x 70"	1250 lbs / 567 kg	60"(1524mm)	70"(1778mm)	30"(762mm)	9"(229mm)	12"(305mm)	YES
WTR-5006	60"x 30"	590 lbs / 268 kg	60"(1524mm)	30"(762mm)	30"(762mm)	12"(305mm)	12"(305mm)	
WTR-5007	60"x 36"	600 lbs / 272 kg	60"(1524mm)	36"(914mm)	30"(762mm)	12"(305mm)	12"(305mm)	