
Installation Instructions - Terrazzo **Precast Shower Floors & Mop Basins**

DO NOT STACK OR STORE TERRAZZO FLAT






MONTEREY









ADATN, ADAWN, WTR WHEELCHAIR ACCESS

MOP SERVICE BASIN

REMOVE CRATE AT INSTALLATION POINT. DO NOT ROCK TERRAZZO ON EDGES IN ORDER TO PREVENT DAMAGES TO CORNERS.

SIERRA

- 2. CHECK ALL SIDES OF PRODUCT FOR TRANSPORTATION DAMAGES.
- A: WIPE FACE OF THE TERRAZZO WITH A WATERED CLOTH.
- B: AFTER WATER EVAPORATES. CHECK FOR CRACKS OR DAMAGE.

NOTE: FIAT PRODUCTS IS NOT RESPONSIBLE FOR SHOWER INSTALLATIONS ADHERING TO A.D.A. GUIDELINES. CHECK LOCAL AUTHORITY FOR CODE AND INSTALLATION REQUIREMENTS

LEVEL PRODUCT CAREFULLY

- 2A. ESTABLISH PROPER CLEARANCE BETWEEN UNIT AND WALL PLACE A 1/2" LAYER OF MORTAR WHERE THE SHOWER FLOOR IS TO BE INSTALLED. THIS PROCEDURE IS REQUIRED BY FIAT TO PROVIDE SUPPORT OF THE UNIT IN CASE THE SUB FLOOR IS UNEVEN. LAYER OF GROUT SHOULD BE AT LEAST 1/4" THICK AND COVER ENTIRE AREA UNDER THE UNIT.
- 2B. ADAT AND ADAW SHOWERS ARE FOR A.D.A. OR PHYSICALLY CHALLENGED USE. THE SHOWER ENTRY SHOULD BE NO MORE THAN 1/4" HIGHER THAN THE FINISHED FLOOR OF THE ROOM. THE ADAT SHOWER SHOULD BE INSTALLED INTO A RECESSED PIT 2 INCHES DEEP TO MEET CODE REQUIREMENTS.
- 2C. IT IS RECOMMENDED THAT A FLOOR DRAIN AT OR NEAR THE ENTRANCE TO ALL ADAT, ADAW AND WTR SHOWER FLOORS BE INCLUDED.


DO NOT LIFT SHOWER BY FL





REMOVE CRATE WITH CARE

DO NOT STAND ON END

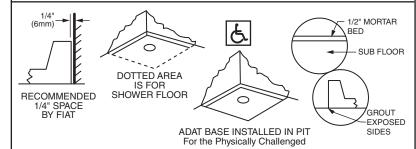

FAILURE TO INSTALL TERRAZZO ON A 1/2" MORTAR BED WILL VOID WARRANTY.

WARNING

3. DO NOT DROP UNIT OVER EXPOSED PIPE. IT IS ADVISABLE TO REMOVE DRAIN PIPE AND SET UNIT IN PLACE. INSERT PIPE THROUGH DRAIN IN FLOOR BACK INTO "P" TRAP.

TIGHTEN METAL CONNECTIONS WITH AN INTERNAL PIPE WRENCH.

IF USING PLASTIC WASTE PIPE, FIT AND SOLVENT WELD.





FROM TRAP



REINSERT PIPE & TIGHTEN WITH AN INTERNAL WRENCH

4A. METHOD OF DRAIN CONNECTION: PLASTIC OR METAL WASTE PIPE

WHEN USING PLASTIC WASTE PIPE, IT IS NECESSARY TO USE THE QDC QUICK DRAIN CONNECTOR.

INSTALL PIPE THROUGH RECEPTOR.

LUBRICATE QDC CONNECTOR WITH SOAP, STRETCH QDC CONNECTOR OVER PIPE WITH LETTERS FACING UP.

TAMP CONNECTOR WITH A HAMMER AND PIECE OF WOOD, WORK AROUND CONNECTOR WITH A SERIES OF BLOWS UNTIL IT BOTTOMS. TOP OF PIPE SHOULD BE EVEN WITH TOP OF CONNECTOR.

4B. METHOD OF DRAIN CONNECTION: METAL WASTE PIPE

USE OAKAM AND MOLTEN LEAD.

THIS LEAD CAULKED JOINT PERMITS LIMITED MOVEMENTS SUCH AS NORMAL STRUCTURAL SETTLEMENT WITHOUT LEAKAGE.

WARNING: MODELS WITH TILING FLANGE OPTIONS

5A. DO NOT LET ROUGH WALL MATERIAL OVERLAP FLANGE.

5B. DO NOT ATTACH FLANGE TO BUILDING.

5C. LET FINISHED WALL (TILE, ETC) OVERLAP AND REST ON SHOULDER.




RECOMMENDED PROCEDURE

- A. TAMP OAKUM TO 5/8" DEPTH B. POUR MOLTEN LEAD
- C. TAMP LEAD CAREFULLY








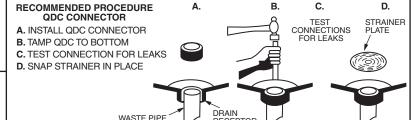







Sealers - New Installations

Immediately following installation of a new floor or thorough cleaning of an older floor, the floor must be sealed with a penetrating sealer. Such sealers are available at paint or tile stores and **must** state that they are approved for use on Terrazzo products. Sealers are not permanent and can be reapplied (after a thorough cleaning) approximately once a year, or as recommended by the manufacturer of the sealer.

RECOMMENDED CLEANING & MAINTENANCE PROCEDURES FOR TERRAZZO PRECAST SHOWER FLOORS AND MOP SERVICE BASINS

Regular Cleaning

To maintain the original terrazzo surface appearance, clean regularly with a liquid detergent such as Joy, Liquid Ajax, or Spic n Span (for the latter, prepare a solution containing 1/2 cup of Spic n Span in a gallon of water). Scrub with a stiff bristled, non-metallic scrub brush and then rinse thoroughly.

NOTE: Do not use any acid (ie, muratic) or cleaning agents that contain acid.

Special or Unusual Conditions

A. Scum on Surface caused by soap, makeup, etc.:

Use a cleaning powder, such as Ajax, plus lots of elbow grease.

B. Surface cleaning: Heel marks, plaster, etc. may require abrasive removal. This can be done with a wet emery cloth. If emery cloth is ineffective, use an 80 to 100 grit aluminum oxide

wet emery cloth. It emery cloth is ineπective, use an 80 to 100 grit aluminum oxide coated paper. Abrasive cloth or paper will result in a very faint grinding away of

the floor surface.

C. Penetrated stains: Stains such as caused by oil, putty, etc., may be removed by scouring with a

cleanser and then soaking floor overnight, if need be, with a commercial bleach

such as Linco, etc.

FIAT PRODUCTS, LLC. LIMITED ONE YEAR WARRANTY FOR PERSONAL RESIDENTIAL AND COMMERCIAL USE OF FIAT® PRODUCTS

WARRANTY COVERAGE

FIAT Products warrants products against defects in material and workmanship under both normal residential and commercial use for as long as it is owned by the original purchaser for a period of one (1) year from the date of first purchase.

This warranty is provided for the exclusive benefit of the initial consumer purchaser or owner. This warranty is non-transferable to subsequent purchasers or owners. The sole exception to the non-transferability of this warranty is that if this product is purchased by a plumber, contractor or other service provider, this warranty extends to the first residential or commercial property owner on whose behalf the product was purchased for installation. This warranty applies only to FIAT® Products installed in the United States of America or Canada.

If a defect arises and a valid claim is received, FIAT Products, at its option, will either (1) repair the product, (2) replace the product or any part therein with a FIAT product of equal or similar type and size, or (3) refund to the consumer the wholesale price of the product. If FIAT Products elects to refund the wholesale price to the consumer, FIAT Products shall have no further obligation to its wholesale customer, or any contractor with respect to such product. Goods proven to be defective will be replaced after proper inspection, but no claims for damages incurred or for work done thereon will be allowed. Replacements when supplied will be shipped at no cost to the consumer.

EXCLUSIONS AND LIMITATIONS

- 1. This warranty only applies to products purchased through an authorized FIAT® Products dealer or re-seller.
- 2. This warranty does not apply to defects or damage caused by non-genuine FIAT parts, installation error, product abuse, product misuse, improper maintenance, improper care or cleaning, improper repair or installation, and/or movement or transfer of the product from its original installation location (whether performed by you, a plumber, a contractor or a service company). Because improper care and cleaning can cause significant damage to the product, it is strongly recommended that you follow the Care and Cleaning Instructions (as well as the other instructions).
- 3. FIAT Products is not responsible for labor charges and/or damage incurred during installation, repair, or replacement.
- 4. FIAT Products does not warrant that this product and/or its installation complies with local code requirements. FIAT Products recommends that you consult with a plumbing contractor about local code requirements.

TO THE EXTENT PERMITTED BY LAW, THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, WHETHER ORAL OR WRITTEN, STATUTORY, EXPRESS, OR IMPLIED. FIAT PRODUCTS HEREBY EXCLUDES SPECIAL, INCIDENTAL AND CONSEQUENTIAL DAMAGES FOR ANY BREACH OF ANY EXPRESS OR IMPLIED WARRANTY APPLICABLE TO THIS PRODUCT.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations and exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state (or province, as applicable).

OBTAINING WARRANTY SERVICE

If you feel you have a warranty claim, contact FIAT Products, either through an authorized FIAT Products dealer or re-seller, or by writing:

In the United States and Canada:

FIAT Products, LLC 4515 E. 139th St. Grandview, MO 64030

Please be sure to provide all pertinent information regarding your claim, including a complete description of the problem, the product, model number, color, finish, purchase date, and from whom the product was purchased.

-2-

For other information, call (833) 549-2887 (in the United States and Canada) or visit www.fiatproducts.com.

710088-100 Rev. D