

## SEQUOIA TERRAZZO SHOWER FLOORS

- Precast terrazzo one piece products are made of black and white marble chips cast in white portland cement to produce a compressive strength of not less than 3000 P.S.I., seven days after casting.
- The terrazzo surface is ground and polished with all air holes and/or pits grouted and the excess removed.
- Tiling flange, cast integral, is of stainless steel and shall extend not less than 1" (25mm) above shoulder.
- Shoulder shall not be less than 4" (102 mm) high inside, 6" (152 mm) high outside and not less than 3" (76 mm) wide.
- The stainless steel drain body is cast integrally into the shower floor and sized for a gasket or provide for a caulked lead connection not less than 1" (25mm) deep to a 2" (51mm) pipe.
- Terrazzo wheelchair receptor with stainless steel ramp.
- For wheelchair accessibility, receptor threshold entry height shall be 1/2" (13 mm).
- Removable type stainless steel plate.
- Quick drain connection using a QDC-4 connector.
- All models are UPC listed.

### OPTIONS:

- Custom sizes available. Must go through custom quoting process.
- Specify color combination (black and white marble chips in white cement is standard). Colors available: white marble chips in white cement.
- Optional vandal proof drain. Must go through the custom quoting process
- QDC4000 Quick Connect gasket for use with 2.375 O.D. pipe.




SEE REVERSE FOR ROUGHING-IN DIMENSIONS

### INSTALLATIONS:


Establish 1/4" clearance between shower floor and wall. It is required that the entire area between the receptor and the building floor have a 1/2" layer of mortar in order that shower floors be level.

It is recommended that a floor drain be installed at or near the entrance of the shower.


**IMPORTANT:** Rough-in dimensions may vary 1/2" (13mm) and are subject to change or cancellation without prior notice.

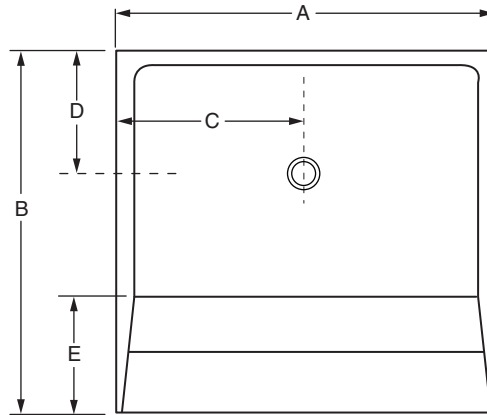

FRONT OF SHOWER

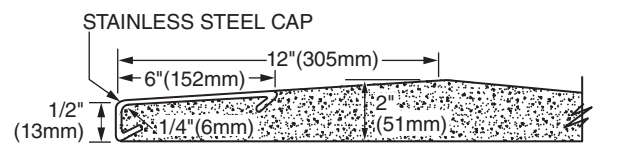

SECTION THRU THRESHOLD FOR WHEELCHAIR RECEPTORS

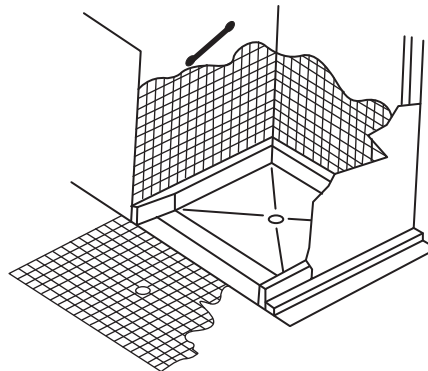

WITH STAINLESS STEEL THRESHOLD ONLY							
MODEL	SIZE	APPROX. SHIP WT.	A	B	C	D	E
WTR-4990	36"x 36"	350 lbs / 159 kg	36"(914mm)	36"(914mm)	18"(457mm)	12"(305mm)	12"(305mm)
WTR-4995	39"x 39"	365 lbs / 166 kg	39"(991mm)	39"(991mm)	19.5"(495mm)	12"(305mm)	12"(305mm)
WTR-5000	48"x 48"	603 lbs / 274 kg	48"(1219mm)	48"(1219mm)	24"(610mm)	18"(457mm)	12"(305mm)
WTR-5001	60"x 48"	623 lbs / 283 kg	60"(1524mm)	48"(1219mm)	30"(762mm)	18"(457mm)	12"(305mm)
WTR-5002	60"x 60"	855 lbs / 388 kg	60"(1524mm)	60"(1524mm)	30"(762mm)	24"(610mm)	12"(305mm)
WTR-5003	42"x 70"	800 lbs / 363 kg	42"(1067mm)	70"(1778mm)	21"(533mm)	9"(229mm)	12"(305mm)
WTR-5004	48"x 70"	880 lbs / 399 kg	48"(1219mm)	70"(1778mm)	24"(610mm)	9"(229mm)	12"(305mm)
WTR-5005	60"x 70"	1250 lbs / 567 kg	60"(1524mm)	70"(1778mm)	30"(762mm)	9"(229mm)	12"(305mm)
WTR-5006	60"x 30"	590 lbs / 268 kg	60"(1524mm)	30"(762mm)	30"(762mm)	12"(305mm)	12"(305mm)
WTR-5007	60"x 36"	600 lbs / 272 kg	60"(1524mm)	36"(914mm)	30"(762mm)	12"(305mm)	12"(305mm)