

**SEQUOIA TERRAZZO SHOWER FLOORS**

- Precast terrazzo one piece products are made of black and white marble chips cast in white portland cement to produce a compressive strength of not less than 3000 P.S.I., seven days after casting.
- The terrazzo surface is ground and polished with all air holes and/or pits grouted and the excess removed.
- Tiling flange, cast integral, is of stainless steel and shall extend not less than 1" (25mm) above shoulder.
- Shoulder shall not be less than 4" (102 mm) high inside, 6" (152 mm) high outside and not less than 3" (76 mm) wide.
- The stainless steel drain body is cast integrally into the shower floor and sized for a gasket or provide for a caulked lead connection not less than 1" (25mm) deep to a 2" (51mm) pipe.
- Terrazzo wheelchair receptor with stainless steel ramp.
- For wheelchair accessibility, receptor threshold entry height shall be 1/2" (13 mm).
- Removable type stainless steel plate.
- Quick drain connection using a QDC-4 connector.
- All models are UPC listed.

**OPTIONS:**

- Custom sizes available. Must go through custom quoting process.
- Specify color combination (black and white marble chips in white cement is standard). Colors available: white marble chips in white cement.
- Optional vandal proof drain. Must go through the custom quoting process
- QDC4000 Quick Connect gasket for use with 2.375 O.D. pipe.



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

**INSTALLATIONS:**

Establish 1/4" clearance between shower floor and wall. It is required that the entire area between the receptor and the building floor have a 1/2" layer of mortar in order that shower floors be level.


It is recommended that a floor drain be installed at or near the entrance of the shower.

**IMPORTANT:** Rough-in dimensions may vary 1/2" (13mm) and are subject to change or cancellation without prior notice.


**CERTIFICATIONS:**

Meets requirements CSA B45.8-18 / IAPMO Z403-2018. All models are CUPC listed Meets the Americans with Disabilities Act guidelines and ANSI A117.1 requirements for accessible and usable building facilities.




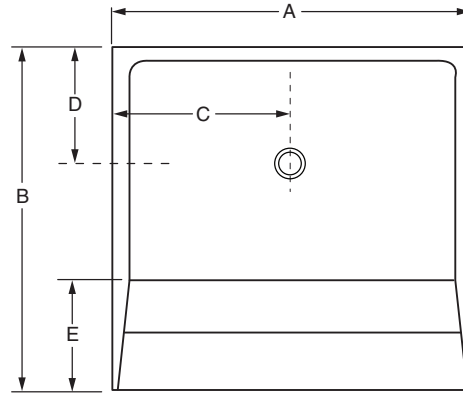

FRONT OF SHOWER

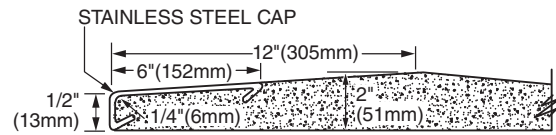

SECTION THRU THRESHOLD FOR WHEELCHAIR RECEPTORS

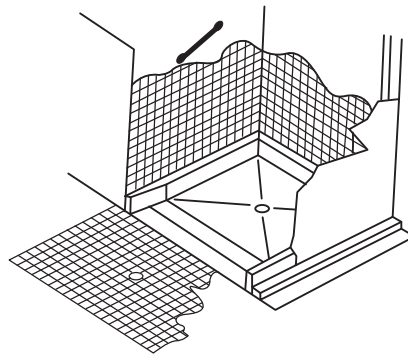

**WITH STAINLESS STEEL THRESHOLD ONLY**

MODEL	SIZE	APPROX. SHIP WT.	A	B	C	D	E
◆ WTR-4990	36" x 36"	350 lbs / 159 kg	36"(914mm)	36"(914mm)	18"(457mm)	12"(305mm)	12"(305mm)
WTR-4995	39" x 39"	365 lbs / 166 kg	39"(991mm)	39"(991mm)	19.5"(495mm)	12"(305mm)	12"(305mm)
WTR-5000	48" x 48"	603 lbs / 274 kg	48"(1219mm)	48"(1219mm)	24"(610mm)	18"(457mm)	12"(305mm)
◆◆ WTR-5001	60" x 48"	623 lbs / 283 kg	60"(1524mm)	48"(1219mm)	30"(762mm)	18"(457mm)	12"(305mm)
◆◆ WTR-5002	60" x 60"	855 lbs / 388 kg	60"(1524mm)	60"(1524mm)	30"(762mm)	24"(610mm)	12"(305mm)
WTR-5003	42" x 70"	800 lbs / 363 kg	42"(1067mm)	70"(1778mm)	21"(533mm)	9"(229mm)	12"(305mm)
WTR-5004	48" x 70"	880 lbs / 399 kg	48"(1219mm)	70"(1778mm)	24"(610mm)	9"(229mm)	12"(305mm)
WTR-5005	60" x 70"	1250 lbs / 567 kg	60"(1524mm)	70"(1778mm)	30"(762mm)	9"(229mm)	12"(305mm)
◆◆ WTR-5006	60" x 30"	590 lbs / 268 kg	60"(1524mm)	30"(762mm)	30"(762mm)	12"(305mm)	12"(305mm)
◆◆ WTR-5007	60" x 36"	600 lbs / 272 kg	60"(1524mm)	36"(914mm)	30"(762mm)	12"(305mm)	12"(305mm)



Meets the Americans with Disabilities Act guidelines and ANSI A117.1 requirements for accessible and usable building facilities. Thresholds must be 1/2" or less when inspected. Check local codes.

- ◆ 36" x 36" shower walls must measure 36" x 36" when inspected
- ◆◆ Shower walls must measure minimum of 60" x 30" when inspected