

GIBRALTAR® SHOWER FLOORS

- Gibraltar® precast terrazzo one piece products are made of black and white marble chips cast in white portland cement to produce a compressive strength of not less than 3000 P.S.I., seven days after casting.
- The terrazzo surface is ground and polished with all air holes and/or pits grouted and the excess removed.
- Factory sealed to resist stains and moisture.
- Tiling flange, cast integral, is of stainless steel and shall extend not less than 1" (25mm) above shoulder.
- Shoulder shall not be less than 4" (102mm) high inside, and not less than 3" (76mm) wide.
- The stainless steel drain body is cast integrally into the shower floor and sized for a gasket or provide for a caulked lead connection not less than 1" (25mm) deep to a 2" (51mm) pipe.
- Removable type stainless steel or brass strainer plate.
- All models are UPC listed.

NOMINAL DIMENSIONS:

- ☐ **RM** 36" x 36" x 6" (914 x 914 x 152 mm)
- ☐ **RMC** 36" x 36" x 6" (914 x 914 x 152 mm)

OPTIONS:

- Custom sizes available. Must go through custom quoting process.
- Specify color combination (black and white marble chips in white cement is standard). Colors available: white marble chips in white cement.
- Optional vandal proof drain. Must go through the custom quoting process.
- Optional Rabbets are available at an additional cost. Must go through the custom quoting process.
- QDC4000 Quick Connect gasket for use with 2.375 O.D. pipe.



SEE REVERSE FOR ROUGH-IN DIMENSIONS

INSTALLATIONS:


Establish 1/4" clearance between shower floor and wall. It is required that the entire area between the receptor and the building floor have a 1/2" layer of mortar in order that shower floors be level.

IMPORTANT: Rough-in dimensions may vary 1/2" (13mm) and are subject to change or cancellation without prior notice.


CERTIFICATIONS:

Meets requirements CSA B45.8-18 / IAPMO Z403-2018. All models are CUPC listed



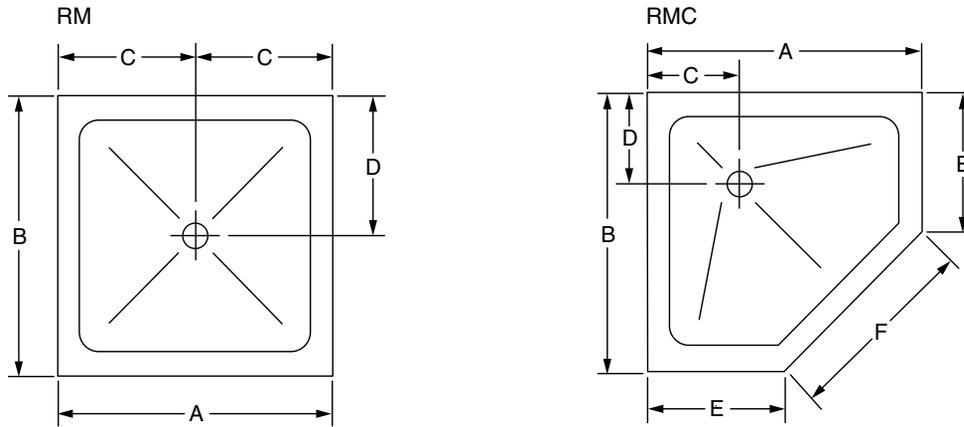

MODEL	SIZE	A	B	C	D	E	F
RM	36" x 36" (914 x 914 mm)	36" (914 mm)	36" (914 mm)	18" (457 mm)	18" (457 mm)	—	—
RMC	36" x 36" (914 x 914 mm)	36" (914 mm)	36" (914 mm)	12" (305 mm)	12" (305 mm)	18" (457 mm)	25-2/8" (645 mm)

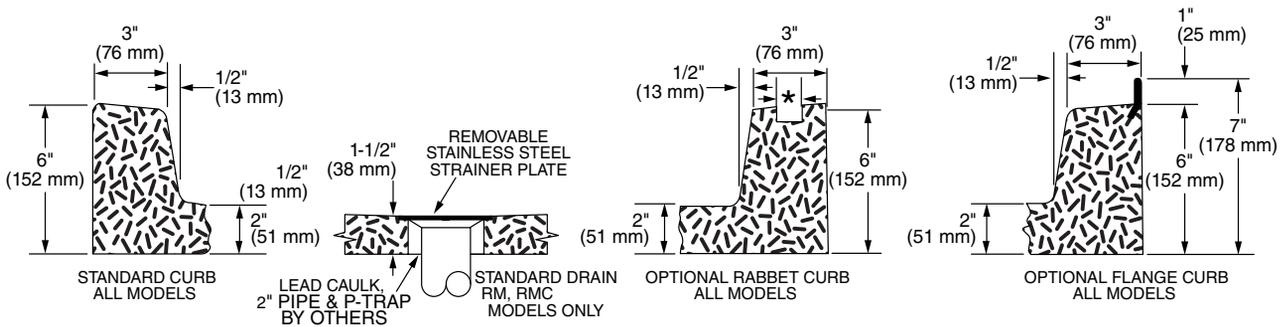

IMPORTANT: Rough-in dimensions may vary 1/2" (13mm) and are subject to change or cancellation without prior notice.

* Not furnished by Fiat® Products. Description for specification purposes only.