

SEQUOIA TERRAZZO SHOWER FLOORS

- Precast terrazzo one piece products are made of black and white marble chips cast in white portland cement to produce a compressive strength of not less than 3000 P.S.I., seven days after casting.
- The terrazzo surface is ground and polished with all air holes and/or pits grouted and the excess removed.
- Factory sealed to resist stains and moisture.
- Tiling flange, cast integral, is of stainless steel and shall extend not less than 1" (25mm) above shoulder.
- Shoulder shall not be less than 4" (102 mm) high inside, 6" (152 mm) high outside and not less than 3" (76 mm) wide.
- The stainless steel drain body is cast integrally into the shower floor and sized for a gasket or provide for a caulked lead connection not less than 1" (25mm) deep to a 2" (51mm) pipe.
- Removable type stainless steel plate.
- Quick drain connection using a QDC-4 connector.
- All models are UPC listed.

OPTIONS:

- Custom sizes available. Must go through custom quoting process.
- Specify color combination (black and white marble chips in white cement is standard). Colors available: white marble chips in white cement.
- Optional vandal proof drain. Must go through the custom quoting process
- QDC4000 Quick Connect gasket for use with 2.375 O.D. pipe.



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

INSTALLATIONS:

Establish 1/4" clearance between shower floor and wall. It is required that the entire area between the receptor and the building floor have a 1/2" layer of mortar in order that shower floors be level.


It is recommended that a floor drain be installed at or near the entrance of the shower.

IMPORTANT: Rough-in dimensions may vary 1/2" (13mm) and are subject to change or cancellation without prior notice.


CERTIFICATIONS:

Meets requirements CSA B45.8-18 / IAPMO Z403-2018. All models are CUPC listed




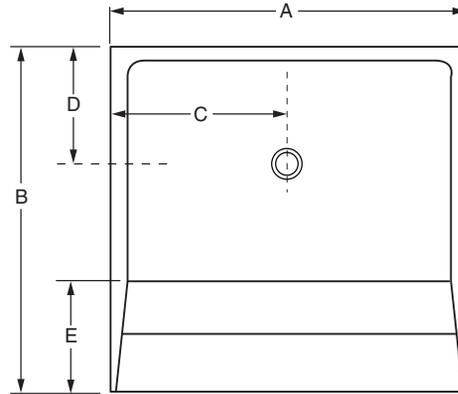

FRONT OF SHOWER

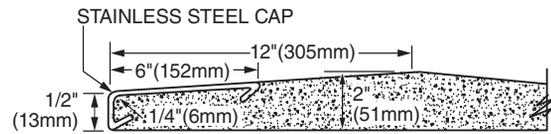

SECTION THRU THRESHOLD FOR WHEELCHAIR RECEPTORS

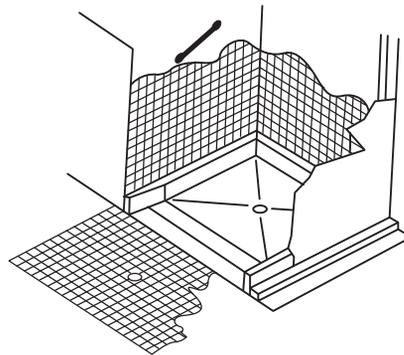

WITH STAINLESS STEEL THRESHOLD ONLY

MODEL	SIZE	APPROX. SHIP WT.	A	B	C	D	E
WTR-4990	36" x 36"	350 lbs / 159 kg	36" (914mm)	36" (914mm)	18" (457mm)	12" (305mm)	12" (305mm)
WTR-4995	39" x 39"	365 lbs / 166 kg	39" (991mm)	39" (991mm)	19.5" (495mm)	12" (305mm)	12" (305mm)
WTR-5000	48" x 48"	603 lbs / 274 kg	48" (1219mm)	48" (1219mm)	24" (610mm)	18" (457mm)	12" (305mm)
WTR-5001	60" x 48"	623 lbs / 283 kg	60" (1524mm)	48" (1219mm)	30" (762mm)	18" (457mm)	12" (305mm)
WTR-5002	60" x 60"	855 lbs / 388 kg	60" (1524mm)	60" (1524mm)	30" (762mm)	24" (610mm)	12" (305mm)
WTR-5003	42" x 70"	800 lbs / 363 kg	42" (1067mm)	70" (1778mm)	21" (533mm)	9" (229mm)	12" (305mm)
WTR-5004	48" x 70"	880 lbs / 399 kg	48" (1219mm)	70" (1778mm)	24" (610mm)	9" (229mm)	12" (305mm)
WTR-5005	60" x 70"	1250 lbs / 567 kg	60" (1524mm)	70" (1778mm)	30" (762mm)	9" (229mm)	12" (305mm)
WTR-5006	60" x 30"	590 lbs / 268 kg	60" (1524mm)	30" (762mm)	30" (762mm)	12" (305mm)	12" (305mm)
WTR-5007	60" x 36"	600 lbs / 272 kg	60" (1524mm)	36" (914mm)	30" (762mm)	12" (305mm)	12" (305mm)